

EuLED - Saturn 48 Watt LED Flood Light

EuLED - Saturn LED Flood Light Range

12 Watt AC
12 Watt DC

24 Watt AC
24 Watt DC

48 Watt AC
48 Watt DC

96 Watt AC

Alternative Products


EuLED - Saturn LED 2D Bulkhead Range

12 Watt AC
12 Watt DC

24 Watt AC
24 Watt DC

48 Watt AC
48 Watt DC

The Saturn 48 Watt LED lighting solution is an environmentally friendly, energy saving, replacement for a traditional sodium, mercury and halogen style flood light. This LED flood light is ready for connection to either AC mains power supply or our Mercury solar power management unit, which provides a flexible lighting solution where mains power is not available or desired.

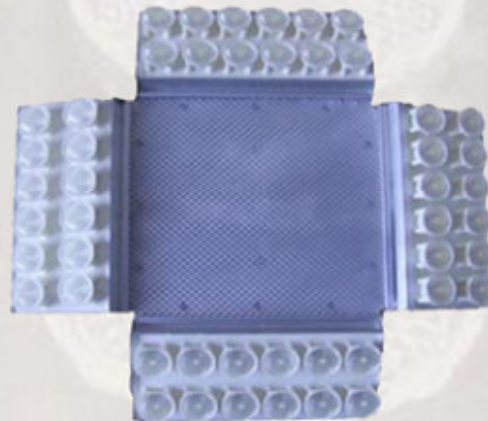

These LED flood lights can be used singularly or in groups to provide lighting for applications ranging from recreation area lighting to warehouse lighting, sign lighting, building lighting, car park lighting and perimeter fence lighting.

Note: All LEDs are encased in a compound that will give them protection from any ingress of liquids or solids and all other electronic components are enclosed in an IP66 rated assembly.

EuLED

Sustainable Lighting Solutions

Willowmere,
Mere Lane,
Finmere,
Bucks,
MK18 4DH5

Tel: +44 (0) 117 230 8238
Fax: +44 (0) 117 981 1223
Email: sales@euled.org

www.EuLED.org



Specifications: Saturn 48 Watt LED Flood Light

Input voltage AC	230V AC 50Hz / 110V AC 60Hz
Input voltage DC	12 VDC
PowerConsumption AC	54 Watts
PowerConsumption DC	48 Watts
Operating temperature	-20 degrees C to + 70 degrees C
Total lamp output	Approx. 2640 Lumens
Correlated colour temperature	4500 to 8000 degrees K
LED Lifespan	Typically 50,000 hours
Turn on time	100ns
Unit colour	Silver
Weight	6.5Kg
Mounting	Chain Mounted Bracket (Standard)
Pole and Wall Mounted versions available.	