

EuLED - Saturn LED 2D Bulkhead Light

EuLED - Saturn LED 2D Bulkhead Range

12 Watt AC
12 Watt DC

24 Watt AC
24 Watt DC

48 Watt AC
48 Watt DC

Alternative Products

EuLED - Saturn LED Floodlight Range

12 Watt AC
12 Watt DC

24 Watt AC
24 Watt DC

48 Watt AC
48 Watt DC

96 Watt AC

EuLED

Sustainable Lighting Solutions



Willowmere,
Mere Lane,
Finmere,
Bucks,
MK18 4DH5

Tel: +44 (0) 117 230 8238
Fax: +44 (0) 117 981 1223
Email: sales@euled.org

www.EuLED.org



The Saturn LED 2D Bulkhead light is a environmentally friendly replacement for traditional 2D bulkhead lighting. Typically using 50% less energy, these LED lights can significantly reduce energy consumption and cut carbon emissions. Ideal for reducing expenditure and helping with environmental issues. The LED 2D Bulkhead light is ready for connection to either AC mains power supply or our Mercury solar power management unit, which provides a flexible lighting solution where mains power is not available or desired.

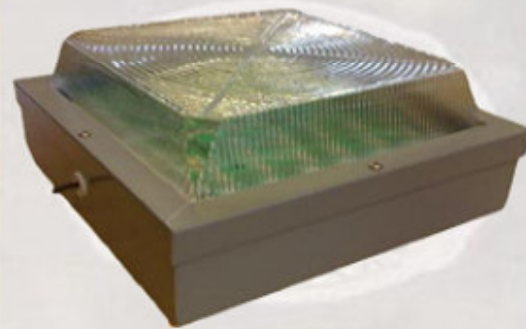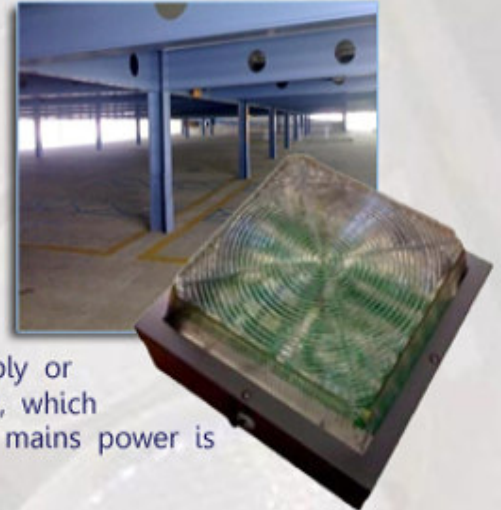

The Saturn LED 2D Bulkhead Light is IP65 rated and comes in a vandal resistant fitting constructed from heavy gauge steel, ideal for use in subways, pedestrian areas, multi storey car parks and any environment prone to vandalism. This versatile luminaire can be ceiling mounted or installed back to back on columns.

Specifications: Saturn LED 2D Bulkhead Light

Input voltage AC	230V AC 50Hz / 110V AC 60Hz
Total Power Consumption	12 watts, 24 watts, 48 watts
Operating temperature	-20 degrees C to + 70 degrees C
Total LED Output	55 Lumens per watt
Correlated colour temperature	4500 to 8000 degrees K
LED Lifespan	Typically 80,000 hours
Turn on time	100ns
Unit colour	Silver
Weight	Approx. 2Kg, 4Kg, 6.5Kg.
Lens Options	Clear or Opal
Mounting	Internal Mounting Holes (Standard) Single or Double Pole Mounting Kits (Optional)